



Quality Drives Value

河南永拓科技有限公司

Henan Yongtuo Technology Co., Ltd

E-mail: eric@ytdishwasher.com

WhatsApp/Tel: +86-198 3809 7144

Web: <https://www.ytdishwasher.com>
<https://hnytkjyxs.en.alibaba.com>

地址:河南省郑州市惠济区迎宾路街道永威迎宾府王岗1号

Add:No.1,3rd Floor,Yongwei Yingbin Mansion,Huiji District,Zhengzhou City,Henan Province



河南永拓科技有限公司

[Henan Yongtuo Technology Co., Ltd.](https://www.henanyongtuo.com)



目录

Table of Contents

02	商用气泡清洗机 Commercial bubble cleaner
03	水循环除渣式气泡清洗机 Water circulating slag removal bubble cleaning machine
04	商用超声波清洗机 Commercial ultrasonic cleaners
05	台下式洗杯机 Undercounter type glasswasher
06	筷勺清洗机 Chopsticks and spoon cleaning machine
08	揭盖式洗碗机 Hood type dishwasher
10	篮传式洗碗机 Basket pass dishwasher
11	平铺式洗碗机 Tile dishwasher
12	长龙式洗碗机 Long line dishwasher
17	鼓泡式长龙洗碗机 Bubbling long line dishwasher
19	鼓泡除渣机 Bubbling slag remover
20	洗箱机系列 BOXTYPE DISHWASHER
21	链板式输送带 CHAIN-PLATE CONVEYOR

商用气泡清洗机/Commercial bubble cleaner



产品特点

- ① 不锈钢拉丝工艺，结实耐用不变形，平滑边角不伤手；
- ② 高频传动气泡，快速去除泥沙/污渍；
- ③ 矩阵式喷嘴布局，同频高频鼓泡，清洗能力更强；
- ④ 多功能自动控制系统，节水节电更省人工；

Product Characteristics

- ① Stainless steel wire drawing process, strong and durable, no deformation, smooth corners without hurting hands ;
- ② High frequency transmission bubbles, fast removal of sediment/stains ;
- ③ Matrix nozzle layout, same frequency and high frequency bubbling, stronger cleaning ability ;
- ④ Multi-functional automatic control system, water-saving, power-saving and labor-saving ;

高效清洗、节水节电更省人工!

清洗机的气泡发生装置，使池内的水产生剧烈翻动，加速冲洗果蔬表面，有效的分离杂质，如泥沙、虫卵等，并且果蔬不会受损伤。

产品型号	Product model	BY-G100	BY-G120	BY-G150	BY-G180
产品规格	Product specifications	1000*800*800+100mm	1200*800*800+100mm	1500*800*800+100mm	1800*800*800+100mm
电压	Voltage	220V	220V	220V	220V
总功率	Total power	4.5kW	4.5kW	4.5kW	4.5kW
洗涤能力	Washing capacity	60斤/时	80斤/时	100斤/时	120斤/时

水循环除渣式气泡清洗机/ Water circulating slag removal bubble cleaning machine

高频鼓泡 快速去除泥沙/污渍High-frequency bubbling quickly removes sediment/stains



●产品特点

- ①清洗功能：能够快速分离餐具、蔬菜、水果等表面的各类污渍,清洗效果显著。
- ②设备优势：自动过滤收集漂浮物，便于清洗维护。
- ③防干烧装置：采用316L材质加热管,有效的增加设备的稳定性;
- ④功能控制：各个功能均能单独控制,可根据现场情况实对调整功能,有效降低能耗。 ,
- ⑤结构设计：箱体采用双开门设计,为设备安装、后期维护保养、操作便利提供了保障。

●Product Characteristics

- ① Multi-functional cleaning, tableware, seafood, fruits and vegetables can be done in one machine;
- ② High-power inverter generator, strong vibration force:
- ③Powerful high-frequency oscillator vibration cleaning, strong penetration, remove heavy oil stubborn pollution:
- ④Made of high-quality stainless steel plate, built-in anti-corrosion and soundproof cotton in the fuselage, which can effectively reduce noise;
- ⑤30~99°C temperature control, effective sterilization, rapid disintegration of dry oil stains:
- ⑥Suitable for a variety of occasions: self-service fast food restaurants, all kinds of restaurants, hotel restaurants and school canteens.saving and labor-saving ;

产品型号	长宽高	配套电源	加热功率	水槽容量	清洗功率	总功率
Product model	length width height	Matching power supply	Heating power	Sink capacity	Cleaning power	Total power
BY-CZ120	(1200+500)*800*800+100	220V/50HZ/16A	4KW	220L	0.55KW	5.3KW
BY-CZ150	(1500+500)*800*800+100	220V/50HZ/16A	4KW	240L	0.55KW	5.3KW
BY-CZ180	(1800+500)*800*800+100	220V/50HZ/16A	4KW	290L	0.55KW	5.3KW

商用超声波清洗机/ Commercial ultrasonic cleaners

高频清洗 强震去油污



●产品特点

- ①多功能清洗，餐具、海鲜、果蔬一机搞定;
- ②大功率变频发生器，震动力强;
- ③强力高频振子振动清洗，穿透力强，祛除重油顽污;
- ④采用优质不锈钢板材，机身内置防腐隔音棉，有效降低噪音;
- ⑤30~99°C控温调节，有效除菌，快速瓦解干油渍;
- ⑥适用多种场合:自助快餐店、各类餐馆、酒店餐厅及学校单位食堂。

●Product Characteristics

- ① Multi-functional cleaning, tableware, seafood, fruits and vegetables can be done in one machine;
- ② High-power inverter generator, strong vibration force:
- ③Powerful high-frequency oscillator vibration cleaning, strong penetration, remove heavy oil stubborn pollution:
- ④Made of high-quality stainless steel plate, built-in anti-corrosion and soundproof cotton in the fuselage, which can effectively reduce noise;
- ⑤30~99°C temperature control, effective sterilization, rapid disintegration of dry oil stains:
- ⑥Suitable for a variety of occasions: self-service fast food restaurants, all kinds of restaurants, hotel restaurants and school canteens.saving and labor-saving ;

产品型号	产品规格	振子数量	总功率	主洗温度
Product model	Product specifications	Number of oscillators	Total power	Main wash temperature
BY-C80	800*800*800+100mm	18个	5.5kW	30~99°C
BY-C100	1000*800*800+100mm	25个	5.5kW	30~99°C
BY-C120	1200*800*800+100mm	35个	7kW	30~99°C
BY-C150	1500*800*800+100mm	46个	7kW	30~99°C
BY-C180	1800*800*800+100mm	60个	7kW	30~99°C
BY-C200	2000*800*800+100mm	60个	7kW	30~99°C
BY-C150S双槽	1500*800*800+100mm	36个	11kW	30~99°C
BY-C180S双槽	1800*800*800+100mm	50个	11kW	30~99°C
BY-C200S双槽	2000*800*800+100mm	58个	11kW	30~99°C

台下式洗杯机/Undercounter type glasswasher

●适用行业:酒吧、咖啡厅和其他餐饮行业;

Applicable industry Ideal for Bars, cafes and other catering industries.

●产品特点

- ①双层外胆结构, 噪声低, 隔热效果好。
- ②上下方旋转式洗涤和漂洗, 清洗更合理。
- ③50 筐每小时的洗涤量, 根据不同的洗涤要求, 有 70S 和 180S 两个洗涤周期可供选择。
- ④自清洗功能。

●Product Characteristics

- ①Double-layer outer tank structure, low noise, good heat insulation effect.
- ②The upper and lower rotary washing and rinsing make the cleaning more reasonable.
- ③The washing capacity of 50 baskets per hour, according to different washing requirements, there are two washing cycles of 70S and 180S to choose from.
- ④Self-cleaning function.



TX-T1

机器型号	Model	TX-T1
外形尺寸(mm)	Outline Dimention(mm)	600x600x800
总重量(kg)	Gross weight(kg)	80
清洗框尺寸(mm)	Rack Size(mm)	500x500x100
最大清洗高度(mm)	Max Washing Height(mm)	320
清洗能力(dishes/hour)	Max Washing Height(r/h)	50
耗水量(liter/rack)	Water consumption(liter/rack)	3
水箱容量(L)	Washing Tank Volum(L)	25
加热包容量(L)	Booster Volume(L)	8
清洗温度(°C)	Washing Temperature(°C)	50-55
漂洗温度(°C)	Rinse Temperature(°C)	80-85
清洗周期(second)	Wash cycle(second)	60/90/120
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.5
进水管径 (in)	Water inlet diameter(in)	G3/4"(DN20)
进水硬度(g/L)	Inlet Water Hardnness(g/L)	0.034-0.103
排水管径(mm)	Drainpipe diameter(mm)	20
加热方式(电)	Heating Mode	电加热
供电要求	Power requirment	220V 50Hz/380V 50Hz 3N
进水温度(°C)	Supply water temperature(°C)	10-60
洗箱加热管功率(kW)	Heater of washing tank(kW)	2
加热包加热管功率 (kW)	Heater of booster(kW)	4/6
清洗泵功率(kW)	Washing pump(kW)	0.55
总功率 (kW)	Total load(kw)	220V4.5/380V6.5

筷勺清洗机/ Chopsticks and spoon cleaning machine
清洗+烘干+消毒/Washing + Drying + Sanitizing

●产品特点

- ①节省人工, 一人收放, 操作简单, 一键启动;
- ②功能齐全, 集除渣清洗烘干消毒于一体, 各类筷子、刀、叉、勺子、皆可洗;
- ③卫生安全, 高效清洗, 高温消毒;

●Product Characteristics

- ①Save labor, one person retracts and releases, simple operation, one-key start;
- ②Complete functions, set slag removal, cleaning, drying and disinfection as a whole, all kinds of chopsticks, knives, forks, spoons, can be washed;
- ③Hygienic and safe, efficient cleaning, high temperature disinfection;

产品型号	产品规格	电压	功率	洗涤量
KZ-1	850*700*1200mm	380V50HZ	9.6kW	2000-5000双/时



揭盖式洗碗机/Hood type dishwasher
 高效洗碗 节省人工/Efficient dishwashing saves labor



●**适用行业:**适用于学校餐厅、酒店、火锅店、快餐连锁店等；
 Applicable industries It is suitable for school restaurants, hotels, hot pot restaurants, fast food chains, etc

●**产品特点**

- ①一键式操作面板，LED温度显示设计，洗涤循环时间可调节60S/90S/120S；
- ②整机采用优质304不锈钢，防腐耐用；一体式冲压水箱杜绝漏水顾虑；
- ③采用双水泵设计，喷淋管冲洗力度更大，洗涤效果更佳；
- ④采用上罩启闭自动助力系统，不锈钢提拉手柄开启关闭不卡顿；
- ⑤自带可视窗，可随时观察清洗状况；

●**Product Characteristics**

- ①One-button operation panel, LED temperature display design, washing cycle time adjustable 60S/90S/120S;
- ②The whole machine is made of high-quality 304 stainless steel, which is anti-corrosion and durable; The integrated stamping water tank eliminates the concern of water leakage;
- ③Adopt double water pump design, the spray pipe flushing force is greater, and the washing effect is better;
- ④Adopt the automatic power assist system for opening and closing the upper cover, and the stainless steel lifting handle will not be stuck when it opens and closes;
- ⑤Built-in window, you can observe the cleaning status at any time;



机器型号	Model	BY-60R	BY-60	BY-60S
外形尺寸(mm)	External Dimention(mm)	750*810*1500	750*810*1500	750*810*1500
清洗框尺寸(mm)	Rack Size(mm)	500*500*100	500*500*100	500*500*100
机器入口宽度(mm)	Passing width(mm)	580	580	580
最大洗涤高度(mm)	Max washing height(mm)	320	320	320
最大洗涤量(Racks/hour)	Max washing Capacity(R/H)	60/小时	60/小时	60/小时
耗水量(liter/rack)	Water consumption(liter/rack)	1	1	1
水箱容量 (L)	Washing Tank Volum(L)	22.8	22.8	22.8
加热包容量(L)	BoosterVolume(L)	11	9.8	19
清洗温度(°C)	Washing Temperature(°C)	60-65	60-65	60-65
漂洗温度(°C)	Rinse Temperature(°C)	82-90	82-90	82-90
清洗周期(second)	Wash cycle(second)	60/90/120	60/90/120	60/90/120
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.4	0.25-0.4	0.25-0.4
进水管径 (in)	Water inlet diameter(in)	4分	4分	4分
排水管径(mm)	Drainpipe diameter(mm)	25	25	25
加热方式	Heating Mode	电	电	电
供电要求	Power requirment	3NPE/380V/50HZ	3NPE/380V/50HZ	3NPE/380V/50HZ
水箱加热功率 (kW)	Tankheating(kW)	2	2	2
漂洗加热功率 (kW)	Booster heating(kW)	6	9	9
清洗水泵功率(kW)	Wash pump(kw)	0.1	0.1	0.1
总功率(可选择)(kW)	Total load(kW)	9	11.8	11.8

篮传式洗碗机/Basket pass dishwasher





产品特点

- ①整机304不锈钢机身，隔热降噪耐腐蚀;
- ②配合使用洗碗筐可清洗不同餐具;
- ③凹陷防堵喷嘴设计，水量分布更均匀，洗涤效果更佳;
- ④内置大功率强劲水泵，全方位清洗无死角;
- ⑤适用于多种场地:学校，各类餐馆，酒店餐厅以及各单位食堂。

Product Characteristics

- ①304 stainless steel body, heat insulation, noise reduction and corrosion resistance;
- ②With the use of dishwashers, different tableware can be cleaned;
- ③Recessed anti-clogging nozzle design, water distribution is more uniform, and the washing effect is better;
- ④Built-in high-power and powerful water pump, all-round cleaning without dead ends;
- ⑤It is suitable for a variety of venues: schools, restaurants, hotel restaurants and canteens.

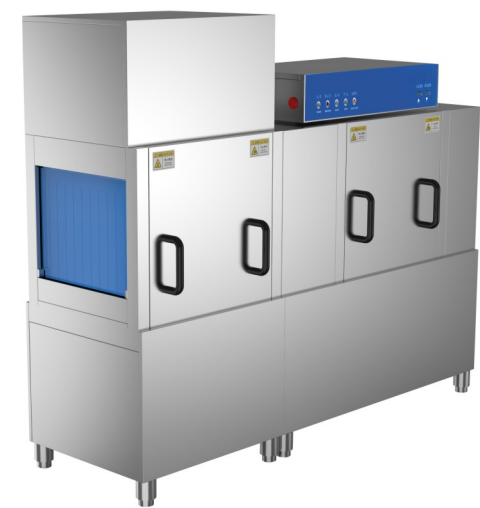

机器型号	Model	LC-1400	LC-1400	LC-2200H	LC-2200H
加热方式	Heating Mode	电加热	蒸汽加热	电加热	蒸汽加热
外形尺寸(mm)	External Dimention(mm)	1400*720*1620	1400*720*1620	2200*720*1870	2200*720*1870
机器入口宽度(mm)	Passing width(mm)	510	510	510	510
最大洗涤高度(mm)	Max washing height(mm)	420	420	420	420
最大洗涤量(Racks/hour)	Max washing Capacity(R/H)	2000-3000	2000-3000	2000-3000	2000-3000
耗水量(liter/hour)	Water consumption(liter/hour)	300-350	300-350	300-350	300-350
水箱容量 (L)	Washing Tank Volum(L)	105	105	105	105
加热包容量(L)	Booster Volume(L)	11	11	11	11
清洗温度 (℃)	Washing Temperature(℃)	50-60	50-60	50-60	50-60
漂洗温度 (℃)	Rinse Temperature(℃)	80-90	80-90	80-90	80-90
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.4	0.25-0.4	0.25-0.4	0.25-0.4
进水管径 (in)	Water inlet diameter(in)	½/20	½/20	½/20	½/20
蒸汽耗量 (kg/h)	Steam consumption(kg/h)	/	50	/	50
蒸汽进入压力(Mpa)	Steam inlet pressure(Mpa)	/	0.3-0.4	/	0.3-0.4
蒸汽进入管径 (in)	Steam inlet pipe diameter(in)	/	G1" (1寸)	/	G1" (1寸)
蒸汽排出管径(in)	Steam outlet pipe diameter(in)	/	G3/4" (6分)	/	G3/4" (6分)
水箱加热功率 (KW)	Tankheating(Kw)	9	/	9	/
漂洗加热功率 (KW)	Booster heating(KW)	26	/	26	/
清洗水泵功率 (KW)	Wash pump(Kw)	1.5	1.5	1.5	1.5
总功率 (KW)	Total load(KW)	36	2	42.8	9
供电要求	Power requirment	3NPE/380V/50HZ	3NPE/380V/50HZ	3NPE/380V/50HZ	3NPE/380V/50HZ

平铺式洗碗机/Tile dishwasher

●产品特点

- ①优选304不锈钢，隔热降噪耐腐蚀；
- ②机型紧凑不占空间，适用于各种场地；
- ③扇形喷淋系统，漂洗全方位喷淋，餐具洁白如新；
- ④餐具平放清洗更全面，餐具自行滑落节省人工。

●Product Characteristics

- ①Preferably 304 stainless steel, heat insulation, noise reduction and corrosion resistance;
- ②The model is compact and does not occupy space, and is suitable for various venues;
- ③Fan-shaped spray system, rinsing all-round spray, tableware white as new;
- ④The tableware is laid flat and cleaned more comprehensively, and the tableware slides off by itself to save labor.



机器型号	Model	CL-1980	CL-1980
加热方式	Heating Mode	电加热	蒸汽加热
外形尺寸(mm)	External Dimention(mm)	1980*860*1525	1980*860*1525
机器入口宽度(mm)	Passing width(mm)	610	610
最大洗涤高度(mm)	Max washing height(mm)	200	200
最大洗涤量(Racks/hour)	Max washing Capacity(R/H)	2000-4000	2000-4000
耗水量(liter/hour)	Water consumption(liter/hour)	300-350	300-350
水箱容量 (L)	Washing Tank Volum(L)	105	105
加热包容量(L)	Booster Volume(L)	11	11
清洗温度 (°C)	Washing Temperature(°c)	50-60	50-60
漂洗温度 (°C)	Rinse Temperature(°C)	80-90	80-90
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.4	0.25-0.4
进水管径 (in)	Water inlet diameter(in)	½/20	½/20
蒸汽耗量 (kg/h)	Steam consumption(kg/h)	/	50
蒸汽进入压力(Mpa)	Steam inlet pressure(Mpa)	/	0.3-0.4
蒸汽进入管径 (in)	Steam inlet pipe diameter(in)	/	G1" (1 寸)
蒸汽排出管径(in)	Steam outlet pipe diameter(in)	/	G3/4" (6分)
水箱加热功率 (KW)	Tankheating(Kw)	9	/
漂洗加热功率 (KW)	Booster heating(KW)	26	/
清洗水泵功率 (KW)	Wash pump(Kw)	2.2	2.2
总功率 (KW)	Total load(KW)	38	2.8
供电要求	Power requirment	3NPE/380V/50HZ	3NPE/380V/50HZ

长龙式洗碗机/Long line dishwasher


●主要适用场所:

大型中央厨房，配餐公司、水产、食品加工厂、高等院校等行业的筐、盘、桶、快速清洗、杀毒灭菌的解决方案。


Main applicable places: large central kitchens, catering companies, aquatic products, food processing plants, colleges and universities and other industries of baskets, plates, barrels, rapid cleaning, sterilization and sterilization solutions.

●产品特点

- ①模块化分段式设计，按需组合更灵活，使运输及安装更加便捷，
- ②超低的漂洗用水量(300-350 升/小时)，大大节省电力、催干剂和洗涤剂用量.洗涤烘干于一体，自动化程度高。
- ③采用大功率水泵形成上下强力对冲喷射系统，循环热水通过独特设计的凹槽形成强大的对冲力清洗餐具，保证360全方位无死角清洗，确保洗涤效果和指标达到一致；
- ④斜插式履带传送系统:一般性餐具无需分类装筐，可直接放于履带上清洗，变速可调每分钟运行约2.7米，机器连续运行工作，节能高效；
- ⑤机器末端限位装置:出口极限位置没有及时取出餐具时履带停止传送，取出餐具履带继续运行，以免损坏餐具；
- ⑥操作系统:按钮式操作、数字显示实时温度，操作简单，机器运行状态一目了然，自动进水、自动补水、自动溢水、自动升温等人性化功能提高了设备整体性能；

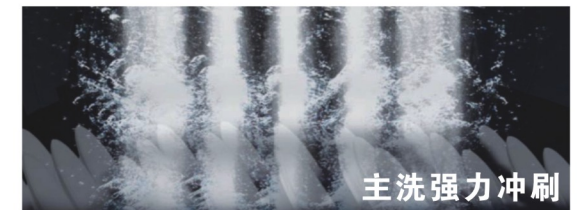

主洗强力冲刷

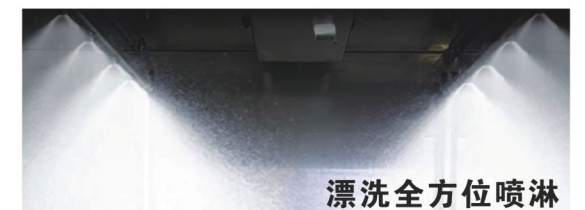

漂洗全方位喷淋



高温烘干杀菌消毒

●Product Characteristics

- ①Modular segmented structure design, more flexible combination on demand, making transportation and installation more convenient.
- ②Ultra-low rinsing water consumption (300-350 liters/hour), greatly saving electricity, drier and detergent. Washing and drying in one, high degree of automation.
- ③The high-power water pump is used to form a strong hedge jet system up and down, and the circulating hot water forms a strong hedge through the uniquely designed groove to clean the tableware, so as to ensure 360 all-round cleaning without dead angles, and ensure that the washing effect and indicators are consistent;
- ④Diagonal crawler conveyor system: general tableware does not need to be classified and basketed, can be directly placed on the crawler for cleaning, the variable speed can be adjusted to run about 2.7 meters per minute, the machine runs continuously, energy saving and high efficiency;
- ⑤Limiting device at the end of the machine: when the cutlery is not taken out in time at the limit position of the outlet, the crawler stops transmitting, and the cutlery crawler continues to run to avoid damage to the tableware;
- ⑥Operating system: button operation, digital display of real-time temperature, simple operation, machine operation status at a glance, automatic water intake, automatic water replenishment, automatic overflow, automatic heating and other humanized functions to improve the overall performance of the equipment;




机器型号	Model	CL-2600		CL-3400	
外形尺寸(mm)	External Dimention(mm)	2600*900*1650		3400*900*1650	
机器入口宽度(mm)	Passing width(mm)	620		620	
最大洗涤高度(mm)	Max washing height(mm)	450		450	
最大洗涤量(Racks/hour)	Max washing Capacity(R/H)	3000-4800		3000-4800	
耗水量(liter/hour)	Water consumption(liter/hour)	300-350		300-350	
水箱容量 (L)	Washing Tank Volum(L)	105		105	
加热包容量(L)	Booster Volume(L)	11		11	
清洗温度 (°C)	Washing Temperature(°c)	50-60		50-60	
漂洗温度 (°C)	Rinse Temperature(°C)	80-90		80-90	
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.4		0.25-0.4	
进水管径 (in)	Water inlet diameter(in)	½/20		½/20	
加热方式	Heating Mode	电	蒸汽	电	蒸汽
蒸汽耗量 (kg/h)	Steam consumption(kg/h)	/	50	/	50
蒸汽进入压力(Mpa)	Steam inlet pressure(Mpa)	/	0.3-0.4	/	0.3-0.4
蒸汽进入管径 (in)	Steam inlet pipe diameter(in)	/	G1" (1 寸)	/	G1" (1 寸)
蒸汽排出管径 (in)	Steam outlet pipe diameter(in)	/	G3/4" (6分)	/	G3/4" (6分)
水箱加热功率 (kW)	Tankheating(kw)	9	/	9	/
漂洗加热功率 (kW)	Booster heating(kW)	26	/	26	/
清洗水泵功率 (kW)	Wash pump(kw)	2.2		2.2	
总功率 (kW)	Total load(kW)	38	3.3	38	3.5
供电要求	Power requirment	380V/50HZ/3NPE		380V/50HZ/3NPE	



机器型号	Model	CL-3700H		CL-3700	
外形尺寸(mm)	External Dimention(mm)	3700*900*1970		3700*900*1650	
机器入口宽度(mm)	Passing width(mm)	620		620	
最大洗涤高度(mm)	Max washing height(mm)	450		450	
最大洗涤量(Racks/hour)	Max washing Capacity(R/H)	3000-4800		3000-4800	
耗水量(liter/hour)	Water consumption(liter/hour)	300-350		300-350	
水箱容量 (L)	Washing Tank Volum(L)	105		105	
加热包容量(L)	Booster Volume(L)	11		11	
清洗温度 (°C)	Washing Temperature(°c)	50-60		50-60	
漂洗温度 (°C)	Rinse Temperature(°C)	80-90		80-90	
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.4		0.25-0.4	
进水管径 (in)	Water inlet diameter(in)	½/20		½/20	
加热方式	Heating Mode	电	蒸汽	电	蒸汽
蒸汽耗量 (kg/h)	Steam consumption(kg/h)	/	50	/	50
蒸汽进入压力(Mpa)	Steam inlet pressure(Mpa)	/	0.3-0.4	/	0.3-0.4
蒸汽进入管径 (in)	Steam inlet pipe diameter(in)	/	G1" (1 寸)	/	G1" (1 寸)
蒸汽排出管径 (in)	Steam outlet pipe diameter(in)	/	G3/4" (6分)	/	G3/4" (6分)
水箱加热功率 (kW)	Tankheating(kw)	9	/	9	/
漂洗加热功率 (kW)	Booster heating(kW)	26	/	26	/
清洗水泵功率 (kW)	Wash pump(kw)	2.2		2.2	
总功率 (kW)	Total load(kW)	51	16	49.5	5.5
供电要求	Power requirment	380V/50HZ/3NPE		380V/50HZ/3NPE	



机器型号	Model	CL-4200H		CL-4200CH	
外形尺寸(mm)	External Dimention(mm)	4200*900*1970		4210*900*1970	
机器入口宽度(mm)	Passing width(mm)	620		620	
最大洗涤高度(mm)	Max washing height(mm)	450		450	
最大洗涤量(Racks/hour)	Max washing Capacity(R/H)	3000-4800		3000-4800	
耗水量(liter/hour)	Water consumption(liter/hour)	300-350		300-350	
水箱容量 (L)	Washing Tank Volum(L)	105		105	
加热包容量(L)	Booster Volume(L)	11		11	
清洗温度 (°C)	Washing Temperature(°c)	50-60		50-60	
漂洗温度 (°C)	Rinse Temperature(°C)	80-90		80-90	
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.4		0.25-0.4	
进水管径 (in)	Water inlet diameter(in)	½/20		½/20	
加热方式	Heating Mode	电	蒸汽	电	蒸汽
蒸汽耗量 (kg/h)	Steam consumption(kg/h)	/	50	/	65
蒸汽进入压力(Mpa)	Steam inlet pressure(Mpa)	/	0.3-0.4	/	0.3-0.4
蒸汽进入管径 (in)	Steam inlet pipe diameter(in)	/	G1" (1 寸)	/	G1" (1 寸)
蒸汽排出管径 (in)	Steam outlet pipe diameter(in)	/	G3/4" (6分)	/	G3/4" (6分)
水箱加热功率 (kW)	Tankheating(kw)	9	/	9	/
漂洗加热功率 (kW)	Booster heating(kW)	26	/	26	/
清洗水泵功率 (kW)	Wash pump(kw)	2.2		2.2	
总功率 (kW)	Total load(kW)	52.8	17.6	51.5	16.3
供电要求	Power requirment	380V/50HZ/3NPE		380V/50HZ/3NPE	

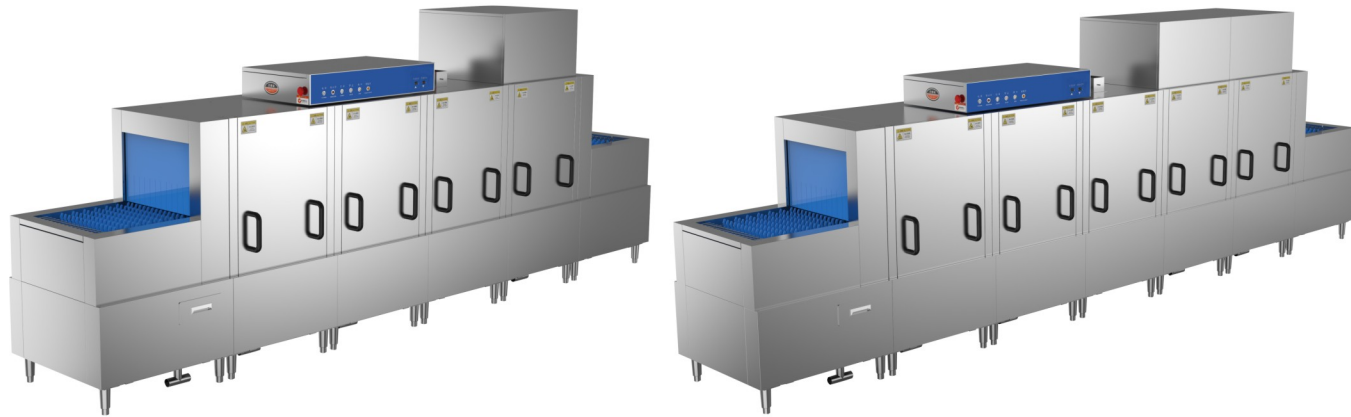

机器型号	Model	CL-5000H		CL-5800H	
外形尺寸(mm)	External Dimention(mm)	5000*900*1970		5820*900*1970	
机器入口宽度(mm)	Passing width(mm)	620		620	
最大洗涤高度(mm)	Max washing height(mm)	450		450	
最大洗涤量(Racks/hour)	Max washing Capacity(R/H)	3000-5000		4000-6000	
耗水量(liter/hour)	Water consumption(liter/hour)	300-350		300-350	
水箱容量 (L)	Washing Tank Volum(L)	105+105		105+105	
加热包容量(L)	Booster Volume(L)	11		11	
清洗温度 (°C)	Washing Temperature(°c)	50-60		50-60	
漂洗温度 (°C)	Rinse Temperature(°C)	80-90		80-90	
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.4		0.25-0.4	
进水管径 (in)	Water inlet diameter(in)	½/20		½/20	
加热方式	Heating Mode	电	蒸汽	电	蒸汽
蒸汽耗量 (kg/h)	Steam consumption(kg/h)	/	65	/	65
蒸汽进入压力(Mpa)	Steam inlet pressure(Mpa)	/	0.3-0.4	/	0.3-0.4
蒸汽进入管径 (in)	Steam inlet pipe diameter(in)	/	G1" (1 寸)	/	G1" (1 寸)
蒸汽排出管径 (in)	Steam outlet pipe diameter(in)	/	G3/4" (6分)	/	G3/4" (6分)
水箱加热功率 (kW)	Tankheating(kw)	9	/	9	/
漂洗加热功率 (kW)	Booster heating(kW)	26	/	26	/
清洗水泵功率 (kW)	Wash pump(kw)	2.2+2.2		2.2+2.2	
总功率 (kW)	Total load(kW)	62	19	75	31.8
供电要求	Power requirment	380V/50HZ/3NPE		380V/50HZ/3NPE	

鼓泡式长龙洗碗机/Bubbling long line dishwasher



●适用行业:大型宾馆酒店、医院、员工食堂、学校食堂集中清洗、消毒公司、航空食品等大型餐饮场所。

large hotels, hospitals, staff canteen, school canteen, centralized cleaning center, disinfection companies, aviation food and other large catering places.

●产品特点

- ①采用机械控制,操作界面直观、清楚快捷。
- ②本机采用模块化设计,基本模块分为:浸泡池模块、清洗模块、双漂洗模块、烘干模块、风刀模块、出口模块等,根据客户要求搭配合理方案。
- ③工业化自动连续清洗,适用多品种餐具集中洗涤、容量大、效率高、操作简单方便易懂。
- ④进端浸泡池有鼓泡清洗功能,可将碟盘上的残渣除掉,浸泡池配置提拉式接渣过滤装置,并且抽屜滤网在机器运行过程中也能够及时取出进行清洁。
- ⑤洗涤量大,适用于各种餐具,浸泡池中带鼓泡风机可将碗碟上的垃圾吹松、吹掉。
- ⑥超低的耗水量,大大的节省电力、催干剂、洗涤剂。
- ⑦喷管采用内凹型喷嘴,压力更稳定,洗涤效果更强劲,上下洗涤臂拆装十分方便,只需轻轻一扣便可锁紧。
- ⑧前门双层结构,隔热、隔音、节约能源且操作舒适。
- ⑨独特的双喷淋系统,高温消毒。
- ⑩烘干系统由强力离心风机和干烧电热管组成。漂洗后的餐县经过风刀由强力吹掉大水珠,然后在经过高温烘干加热对餐具进行消毒杀菌烘干等处理,烘干率达到90%以上。
- ⑪传送机构采用变频器控制速度,实现无极变速。
- ⑫餐具掉落卡位自动停止,标配急停保护装置安全可靠,出口端可选配餐具自动滑出与带限位款,简便实用。

●Product Characteristics

- ①Using mechanical control, the operation interface is intuitive, clear and fast.
- ② This machine adopts modular design, and the basic modules are divided into: immersion tank module, cleaning module, double rinsing module, drying module, air knife module, outlet module, etc., according to customer requirements.
- ③Industrial automatic continuous cleaning, suitable for centralized washing of various kinds of tableware, large capacity, high efficiency, simple, convenient and easy to understand.
- ④The inlet end soaking pool has a bubbling cleaning function, which can remove the residue on the disc, and the soaking pool is equipped with a pull-type slag filtration device, and the drawer filter can also be taken out for cleaning in time during the operation of the machine.

- ⑤Large washing capacity, suitable for all kinds of tableware, soaking pool with bubble fan can blow the garbage on the dishes, blow off.
- ⑥Ultra-low water consumption, greatly saving electricity, driers, detergents.
- ⑦The nozzle adopts a concave nozzle, the pressure is more stable, the washing effect is stronger, and the upper and lower washing arms are very convenient to disassemble and assemble, and can be locked with just a light button.
- ⑧The double-layer structure of the front door is heat-insulated, sound-insulating, energy-saving and comfortable to operate.
- ⑨Unique double spray system, high temperature disinfection.
- ⑩The drying system is composed of a powerful centrifugal fan and a dry-burning electric heating pipe. After rinsing, the meal county is strongly blown off by the air knife, and then the tableware is disinfected, sterilized, dried and dried at high temperature, and the drying rate reaches more than 90%.
The transmission mechanism adopts inverter to control the speed to achieve stepless speed change.
The tableware will stop automatically when it falls off, and the standard emergency stop protection device is safe and reliable, and the outlet can be equipped with automatic tableware slide-out and a limit model, which is simple and practical.

机器型号	Model	CL-7200YH	CL-7200YH
外形尺寸(mm)	External Dimention(mm)	7200*900*1970	7200*900*1970
机器入口宽度(mm)	Passing width(mm)	620	620
最大洗涤高度(mm)	Max washing height(mm)	450	450
最大洗涤量(Racks/hour)	Max washing Capacity(R/H)	4500-7000	4500-7000
耗水量(liter/hour)	Water consumption(liter/hour)	300-350	300-350
水箱容量 (L)	Washing Tank Volum(L)	105+105	105+105
加热包容量(L)	Booster Volume(L)	11	11
清洗温度 (°C)	Washing Temperature(°c)	50-60	50-60
漂洗温度 (°C)	Rinse Temperature(°C)	80-90	80-90
供水水压 (Mpa)	Water Supply Pressure(Mpa)	0.25-0.4	0.25-0.4
进水管径 (in)	Water inlet diameter(in)	½/20	½/20
加热方式	Heating Mode	电	蒸汽
蒸汽耗量 (kg/h)	Steam consumption(kg/h)	/	100
蒸汽进入压力(Mpa)	Steam inlet pressure(Mpa)	/	0.3-0.4
蒸汽进入管径 (in)	Steam inlet pipe diameter(in)	/	G1" (1 寸)
蒸汽排出管径 (in)	Steam outlet pipe diameter(in)	/	G3/4" (6分)
水箱加热功率 (kW)	Tankheating(kw)	9	/
漂洗加热功率 (kW)	Booster heating(kW)	26	/
清洗水泵功率 (kW)	Wash pump(kw)	2.2+2.2	2.2+2.2
总功率 (kW)	Total load(kW)	83/86/89	33/42/44
供电要求	Power requirment	380V/50HZ/3NPE	380V/50HZ/3NPE

鼓泡除渣机/Bubbling slag remover



●**适用行业:**大型宾馆酒店、医院、员工食堂、学校食堂集中清洗、消毒公司、航空食品等大型餐饮场所。

large hotels, hospitals, staff canteen, school canteen, centralized cleaning center, disinfection companies, aviation food and other large catering places.

●产品特点

- ①机械控制面板，操作简便。
- ②餐具投鼓泡泡池后可自动输送至洗碗机省时省力，配合餐具输送线效果更佳。
- ③整机双层结构，牢固可靠。
- ④独特的鼓泡功能可将餐具上的残渣洗掉。
- ⑤设有电机过载保护，如有异物卡住输送带会动停机，避免损坏机器。
- ⑥浸泡洗涤量大，适用于多种餐具。
- ⑦输送链排装置采用耐热、耐腐蚀、卫生无毒、强度高造型美观的工程塑料网带。
- ⑧机器外部设有残渣收集篮，让设备内部更干净，处理残渣方便快捷。
- ⑨内置低水位开关，更好的保护加热管。

●Product Characteristics

- ①Mechanical control panel, easy to operate.
- ②After the tableware is put into the bubbling pool, it can be automatically transported to the dishwasher, saving time and effort, and the effect is better with the tableware conveyor line.
- ③The double-layer structure of the whole machine is firm and reliable.
- ④The unique bubbling function washes off the residue on the tableware.
- ⑤Equipped with motor overload protection, if there is a foreign object stuck on the conveyor belt, it will automatically stop to avoid damage to the machine.
- ⑥Large amount of soaking and washing, suitable for a variety of tableware.
- ⑦The conveyor chain device is made of engineering plastic mesh claw with heat resistance, corrosion resistance, hygiene and non-toxicity, high strength and beautiful appearance.
- ⑧There is a residue collection basket on the outside of the machine, which makes the inside of the equipment cleaner and the residue is convenient and fast.
- ⑨Built-in low water level switch to better protect the heating pipe.

洗箱机系列/BOXTYPE DISHWASHER



●**适用行业:**适用于航食、中央厨房、大型宾馆酒店、配送中心、食品加工厂、学校、医院、化工企业等清洗行业。

Applicable venue It is suitable for cleaning industries such as aviation catering, central kitchens, large hotels, distribution centers, food processing plants, schools, hospitals, and chemical companies.

●**产品功能:**清洗周转箱、保温箱、汤桶等器皿。

Product Features Turnover boxes and other boxes.

●产品特点


- ①食品级不锈钢输送带，确保食品卫生；
- ②驱动棍、输送棍为不锈钢材质，方便拆卸；

●Product Characteristics

- ①The belt adopts imported food-grade materials to ensure food hygiene ;
- ②The driving rod and the conveying rod are made of stainless steel, which is easy to disass ;

机器型号	Mode	XK-49	XK-66
外形尺寸(mm)	External Dimention(mm)	4900x1100x1580	6600x1100x1580
最大清洗高度(mm)	Max washing height(mm)	500	400
最大清洗宽度(mm)	Max washing width(mm)	800	620
生产能力	Production capacity	200箱/小时	300箱/小时
进水管径	Water inlet diameter(in)	DN32	DN32
排水管径	Drainpipe diameter(mm)	DN50	DN50
耗水量(kg/h)	Water consumption(kg/h)	800kg/h	800kg/h
进汽管径	Steam inlet pipe diameter(in)	DN32	Dn32
蒸汽耗量(kg/h)	Steam consumption(kg/h)	100kg/h	120kg/h
蒸汽压力(Mpa)	Steam inlet pressure(Mpa)	0.3-0.4Mpa	0.3-0.4Mpa
电加热功率(kw)	Electric heating power(kw)	59kw	76.3kw
蒸汽加热功率(kw)	Steam heating power(kw)	5kw	8kw

链板式输送带/CHAIN-PLATE CONVEYOR

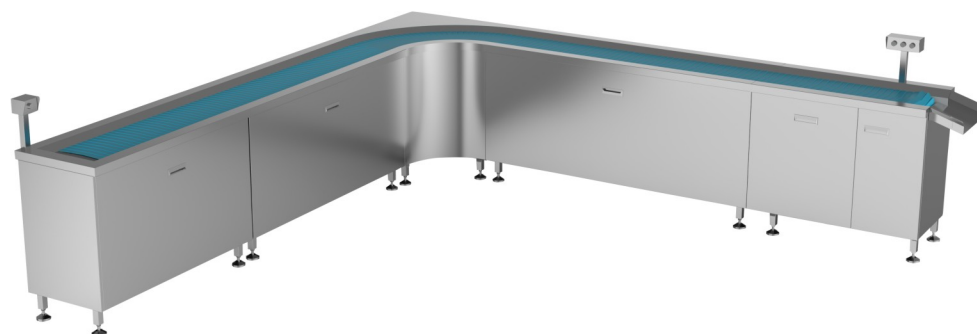

●产品特点

- ①适合各种类型餐具使用，操作方便。
- ②采用优质不锈钢材质、耐腐蚀、强度高、韧性好。
- ③采用进口食品级 POM 链片,确保食品卫生。
- ④配置柔性启动和停止设计，采用变频调速。
- ⑤主动轴和被动轴为不锈钢材质，方便拆卸。
- ⑥配置链板自动清洗功能，在传送中可保持链板卫生
- ⑦内置抽屉，易于清洗。
- ⑧可根据客户要求定做长度、高度，
- ⑨可选配勺筷回收柜、隔音罩、预洗水槽等满足不同用户需求。

●Product Characteristics

- ①It is suitable for various types of tableware and is easy to operate.
- ②Made of high-quality stainless steel, corrosion resistance, high strength and good toughness.
- ③Imported food-grade POM chains are used to ensure food hygiene.
- ④It is equipped with flexible start and stop design and adopts frequency conversion speed regulation.
- ⑤The driving shaft and the driven shaft are made of stainless steel, which is easy to disassemble.
- ⑥Equipped with the automatic cleaning function of the chain plate, the chain plate can be kept hygienic during transmission.
- ⑦Built-in drawer, easy to clean.
- ⑧The length and height can be customized according to customer requirements
- ⑨Optional spoon chopstick recovery cabinet, soundproof cover, pre-wash sink, etc. to meet different user needs

●术语介绍

I: 直线型 L: 转弯型 U: 回转型 O: 循环型

Term Introduction

I: Straight type L: Turning type U: Revolving type O: Circulating type

转角型分类直角转弯 圆角转弯

Corner Type Classification Right angle turn round corner turn

